

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 4 : <b>H04B 7/24</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 90/04293</b> (43) International Publication Date: <b>19 April 1990 (19.04.90)</b></p>
<p>(21) International Application Number: <b>PCT/US89/03452</b> (22) International Filing Date: <b>14 August 1989 (14.08.89)</b> (30) Priority data: <b>253,529</b>                      <b>5 October 1988 (05.10.88)</b>      <b>US</b> (71) Applicant: <b>MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</b> (72) Inventors: <b>SAGERS, Richard, Cameron ; 4112 Bristlecone Lane, Fort Worth, TX 76137 (US). WERNER, William, Dennis ; 2921 Creekwood Drive, Grapevine, TX 76051 (US). HALL, Scott, Maurice ; 4324 Crabapple Street, Fort Worth, TX 76137 (US).</b></p>		<p>(74) Agents: <b>PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Department, 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</b> (81) Designated States: <b>AT (European patent), AU, BE (European patent), BR, CH (European patent), DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent).</b>  <b>Published</b> <i>With international search report.</i></p>

(54) Title: LOCATION-BASED ADAPTIVE RADIO CONTROL

(57) Abstract

A method (200) and apparatus (100) is provided for a radio having adjustable operating parameters to adjust at least one such adjustable operating parameter based on the current location of the radio. Operating parameters which may be so adjusted include, but are not limited to, the following: transmitting power (106, 107), operating channel, operating band (103, 104), modulation type, modulation index, frequency deviation, squelch setting, channel spacing, control channel (109, 110) (for trunked communications), noise blanker characteristic, and receive bandwidth. The location is determined by the radio (101).

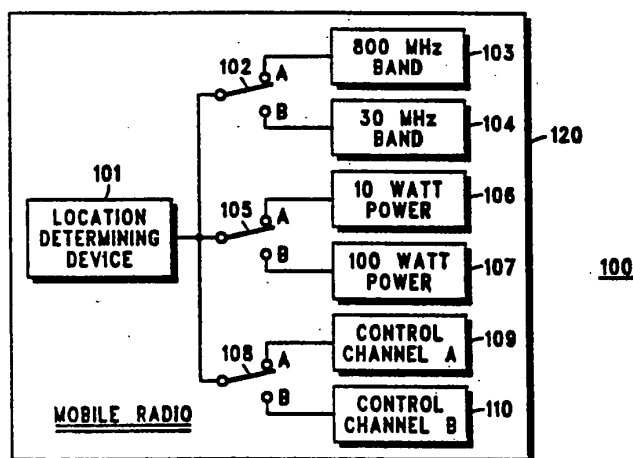

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MR	Mauritania
BE	Belgium	GA	Gabon	MW	Malawi
BF	Burkina Faso	GB	United Kingdom	NL	Netherlands
BG	Bulgaria	HU	Hungary	NO	Norway
BJ	Benin	IT	Italy	RO	Romania
BR	Brazil	JP	Japan	SD	Sudan
CA	Canada	KP	Democratic People's Republic of Korea	SE	Sweden
CF	Central African Republic	KR	Republic of Korea	SN	Senegal
CG	Congo	LI	Licchtenstein	SU	Soviet Union
CH	Switzerland	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany, Federal Republic of	MC	Monaco	US	United States of America
DK	Denmark				

-1-

5

## LOCATION-BASED ADAPTIVE RADIO CONTROL

10 Background of the Invention

This invention pertains to radios.

Two-way radios have a number of operating parameters including, but not limited to, transmitting power, operating frequencies (channel), operating band, modulation type, modulation index, frequency deviation, 15 squelch setting, channel spacing, control channel (for trunked communications), noise blanker characteristic, and receive bandwidth. Of these parameters, some are fixed, while others may be, to some degree, variable. One example of a parameter which is usually, but not 20 always, fixed is the modulation type, such as FM or AM. One example of a parameter which is usually, but not always, variable is the operating frequency or frequencies (channel).

At a given time, it may be desirable to adjust 25 the operating parameters in response to the current operating environment to obtain optimum performance. For example, it may be desirable to minimize interference to other users.

A significant factor in determining the current 30 optimum operating parameters is the geographic location of the radio. As an example, a particular radio operating in a densely-populated area, such as downtown

35

Los Angeles, California must contend with, among other factors, a relatively large number of other radios using the same frequency spectrum. As a result, the available frequencies (channels) may be limited. Also, the radio must limit its transmitting power to avoid interfering with neighboring users. On the other hand, if this identical radio were located in the middle of a sparsely-populated area, such as Death Valley, California, it would contend with few (if any) other radios using the same frequency spectrum. As a result, more channels are available and the transmitting power may be increased to achieve greater range without interfering with neighboring users.

For radios which are fixed in location, that is, non-mobile, usually there are few parameters, if any, which need to be varied during day-to-day operation. This is because the operating environment is relatively constant for the radio which is due, to a large extent, to the fact that the location of the radio is fixed.

For radios whose location is not fixed (that is, mobile), on the other hand, it is desirable for operating parameters to be adjusted whenever a change in the location of the radio causes the operating environment to change. For example, using our above example, if a mobile radio initially selects an operating frequency band and transmit power while it is located in downtown Los Angeles, the radio may need to periodically adjust (change) these frequency band and power settings as its location constantly changes during the course of its journey from the downtown area to a final destination of Death Valley. Moreover, it also may be advantageous to change other operating parameters during the course of such a journey.

Another situation where a mobile radio might need to adjust operating parameters based on its location arises in trunked radio systems. In such systems, many subscriber units share a fixed (and typically smaller)

number of communication channels. In such systems, a common control station uses a control channel to allocate the shared channels amongst the subscriber units. When a subscriber wishes to place a call, it first tunes to the control channel and transmits a channel request message 5 to the control station. Upon receipt of this message (and assuming an idle channel is available) the control station reserves, or assigns, an idle channel for the call. The control station then transmits the channel assignment information to the requesting subscriber via 10 the control channel. Upon receipt of this channel assignment message, the requesting subscriber unit tunes to the assigned channel and proceeds to place its call.

A possible scenario which might arise in such trunked systems is a mobile subscriber unit which travels 15 in geographic region A served by trunked system A with associated control channel A, and which mobile subscriber unit also travels in region B served by trunked system B with associated control channel B. With present trunked radio systems, no convenient mechanism exists to allow 20 the subscriber unit to easily and readily change from one trunked system to another when travelling in this way.

In general, then, it is desirable for a mobile radio to have the ability to change operating parameters based on its current location. Given this fact, the 25 question arises of how to effect the desired changes in the operating parameters. While it is obvious the human operator could manually adjust the operating parameters to obtain optimum performance, this could also prove to be risky. This is because, due to human error, the 30 operator may be mistaken as to either the present location of the radio, or the current optimum operating parameters for the present location of the radio, or both.

35

### Summary of the Invention

Therefore, it is an object of the present invention to vary one or more operating parameters of a mobile radio automatically, and without human intervention, based on the location of the radio. According to the invention, a method is provided, and an apparatus described, whereby one or more operating parameters of a mobile radio may be varied automatically, and without human intervention, based on the location of the radio.

### Brief Description of the Drawings

Fig. 1 depicts the location-based adaptive radio control arrangement.

Fig. 2 depicts a flow diagram illustrating the steps of the invention.

### Detailed Description of the Invention

The invention may be used with any location determining device or system (101), such as LORAN, satellite global positioning systems, or dead reckoning, and with any mobile radio having adjustable operating parameters. Such location determining systems are well understood and need not be described here in any further detail. (In the context of this invention, "mobile" refers to a non-fixed location radio, and includes both vehicle mounted and personally carried radios.)

The invention (100) is shown in Fig. 1.

Switch 1 (102) is arranged to select the operating frequency band of the radio. When switch 1 is in position designated "A", the radio operates on the 800 MHz band (103). When switch 1 is in the position designated "B", the radio operates on the 30 MHz band (104).

Switch 2 (105) is arranged to select the output power level of the transmitter. When switch 2 is in the position designated "A", the output power is 10 Watts (106). When switch 2 is in the position designated "B", the output power is 100 Watts (107).

5 Switch 3 (108) is arranged to select the control channel of the radio. When switch 3 is in the position designated "A", the control channel selected is channel A (109). When switch 3 is in position designated "B", the control channel selected is channel B (110).

10 The mobile radio (120) is equipped with a location determining device (101) which, in turn, is arranged to control the position of switch 1 (102), switch 2 (105), and switch 3 (108). In this embodiment, the location determining device (101) is capable of  
15 determining whether the radio is located in location A (the urban area) or location B (the rural area).

When the location determining device (101) determines the radio is located in location A, it causes switch 1 (102) to reside in position "A", thereby causing  
20 the radio to operate on the 800 MHz band. Also when the location determining device (101) determines the radio is located in location A, it causes switch 2 (105) to reside in position "A", thereby causing the radio to transmit at 10 Watts power output. Finally, when the location  
25 determining device (101) determines the radio is located in location A, it causes switch 3 (108) to also reside in position "A", thereby causing the radio to use channel A as a control channel.

When the location determining device (101) determines the radio is located in location B, it causes switch 1 (102) to reside in position "B", thereby causing  
30 the radio to operate on the 30 MHz band. Also when the location determining device (101) determines the radio is located in location B, it causes switch 2 (105) to reside in position "B", thereby causing the radio to transmit at  
35 100 Watts power output. Finally, when the location

- 6 -

determining device (101) determines the radio is located in location B, it causes switch 3 (108) to reside in position "B", thereby causing the radio to use channel B as a control channel.

5 Fig. 2 shows the flow diagram (200) of the steps of the invention.

10 The process starts with the radio determining its location (201). If the radio determines it is located in a first predetermined location, such as location A (the urban area), the radio operates on the 800 MHz band (202), adjusts the transmitter to 10 Watts of output power (203), and uses channel A as a control channel (204). The radio then returns (220) to its initial determining step (201), and makes a new determination of its location.

15 In this embodiment, if the radio determines it is located in location B (the rural area), the radio operates on the 30 MHz band (212), adjusts its transmitter to 100 Watts of output power (213), and uses channel B as a control channel (214). The radio then  
20 returns (220) to its initial determining step (201), and makes a new determination of its location.

What is claimed is:

25

30

35



CLAIMS:

1. A method for adjusting a radio comprising the steps of:  
in said radio:  
5 (a) determining said radio's location; and,  
(b) responsive to said determination, automatically  
adjusting at least one variable operating parameter.

2. A method for adjusting a radio, comprising the steps of:  
in said radio:

(a) determining when said radio is located within a  
predetermined region; and,

5 (b) responsive to said determination, automatically  
adjusting at least one variable operating parameter.

3. A method for adjusting a radio, comprising the steps of:  
in said radio:

(a) determining which of several predetermined  
regions said radio is located within; and;

5 (b) responsive to said determination, automatically  
adjusting at least one variable operating parameter.

4. A method for adjusting a radio, comprising the steps of:
- (a) determining said radio's distance from at least one predetermined fixed point; and,
  - (b) responsive to said determination, automatically
- 5 adjusting at least one variable operating parameter.

5. A radio having adjusting means, said adjusting means comprising:
- means for determining said radio's location; and
  - means responsive to said determining means for
- 5 automatically adjusting at least one variable operating parameter.

6. A radio having adjusting means; said adjusting means comprising:
- means for determining when said radio is located within a predetermined region; and,
- 5 means responsive to said determining means for automatically adjusting at least one variable operating parameter.

7. A radio having adjusting means, said adjusting means comprising:

means for determining which of several predetermined regions said mobile radio is located within; and,

5 means responsive to said determining means for automatically adjusting at least one variable operating parameter.



8. A radio having adjusting means, said adjusting means comprising:

means for determining said radio's distance from at least one predetermined fixed point; and,

5 means responsive to said determining means for automatically adjusting at least one variable operating parameter.



1/1

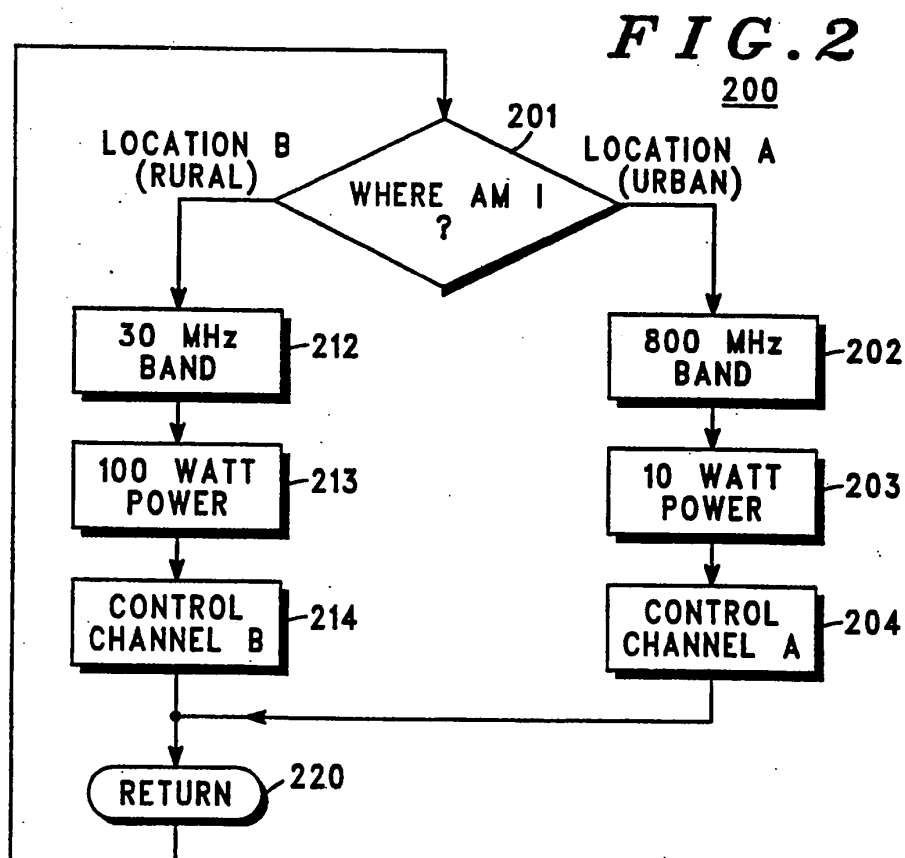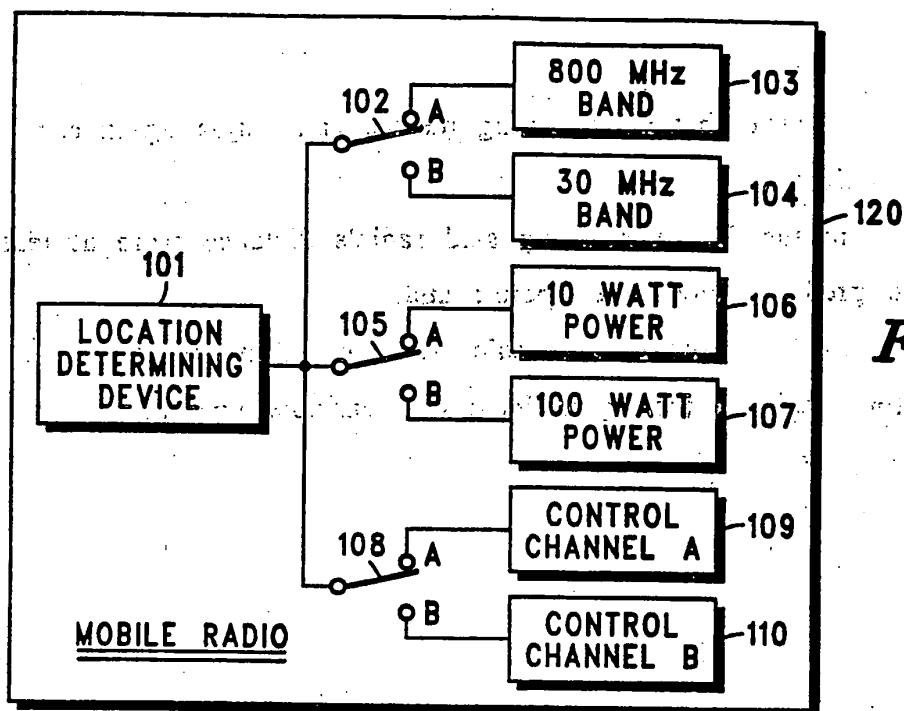

# INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US89/03452**

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (If several classification symbols apply, indicate all) * According to International Patent Classification (IPC) or to both National Classification and IPC <b>Int. C14 H04B 7/24</b> <b>U.S. C1. 455/33.</b>																	
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Minimum Documentation Searched †</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; border: 1px solid black; text-align: left;">Classification System</th> <th style="border: 1px solid black; text-align: left;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; vertical-align: top; padding: 5px;"><b>U.S.</b></td> <td style="border: 1px solid black; padding: 5px;">           455: 33, 35, 62, 67, 54, 88, 89, 127, 166, 183,            184, 185, 186, 200, 212, 218, 221            342: 419, 457         </td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ‡</div>			Classification System	Classification Symbols	<b>U.S.</b>	455: 33, 35, 62, 67, 54, 88, 89, 127, 166, 183, 184, 185, 186, 200, 212, 218, 221 342: 419, 457											
Classification System	Classification Symbols																
<b>U.S.</b>	455: 33, 35, 62, 67, 54, 88, 89, 127, 166, 183, 184, 185, 186, 200, 212, 218, 221 342: 419, 457																
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT †</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; border: 1px solid black; text-align: left;">Category *</th> <th style="border: 1px solid black; text-align: left;">Citation of Document, †† with indication, where appropriate, of the relevant passages ‡‡</th> <th style="width: 10%; border: 1px solid black; text-align: left;">Relevant to Claim No. ‡‡</th> </tr> <tr> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;"><b>X</b></td> <td style="border: 1px solid black; padding: 5px;">US, A, 4,476,582 Strauss et al 09 October 1984, See the Figure and column 2, lines 39 to 68 and column 5, lines 3 to 16 and 44-61.</td> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;">1-8</td> </tr> <tr> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;"><b>A</b></td> <td style="border: 1px solid black; padding: 5px;">US, A, 4,550,443 Freeburg 29 October 1985.</td> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;">1-8</td> </tr> <tr> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;"><b>A</b></td> <td style="border: 1px solid black; padding: 5px;">US, A 4,765,753 Schmidt 23 August 1988</td> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;">1-8</td> </tr> <tr> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;"><b>A</b></td> <td style="border: 1px solid black; padding: 5px;">US, A, 3,906,166 Cooper et al. 16 September 1975.</td> <td style="border: 1px solid black; vertical-align: top; text-align: center; padding: 5px;">1-8</td> </tr> </table>			Category *	Citation of Document, †† with indication, where appropriate, of the relevant passages ‡‡	Relevant to Claim No. ‡‡	<b>X</b>	US, A, 4,476,582 Strauss et al 09 October 1984, See the Figure and column 2, lines 39 to 68 and column 5, lines 3 to 16 and 44-61.	1-8	<b>A</b>	US, A, 4,550,443 Freeburg 29 October 1985.	1-8	<b>A</b>	US, A 4,765,753 Schmidt 23 August 1988	1-8	<b>A</b>	US, A, 3,906,166 Cooper et al. 16 September 1975.	1-8
Category *	Citation of Document, †† with indication, where appropriate, of the relevant passages ‡‡	Relevant to Claim No. ‡‡															
<b>X</b>	US, A, 4,476,582 Strauss et al 09 October 1984, See the Figure and column 2, lines 39 to 68 and column 5, lines 3 to 16 and 44-61.	1-8															
<b>A</b>	US, A, 4,550,443 Freeburg 29 October 1985.	1-8															
<b>A</b>	US, A 4,765,753 Schmidt 23 August 1988	1-8															
<b>A</b>	US, A, 3,906,166 Cooper et al. 16 September 1975.	1-8															
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: †‡</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 50%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p> </div> </div>																	
<b>IV. CERTIFICATION</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; padding: 5px;">           Date of the Actual Completion of the International Search   <b>31 October 1989</b> </td> <td style="width: 50%; border: 1px solid black; padding: 5px;">           Date of Mailing of this International Search Report   <b>29 NOV 1989</b> </td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">           International Searching Authority   <b>ISA/US</b> </td> <td style="border: 1px solid black; padding: 5px;">           Signature of Authorized Officer    <b>Ralph E. Smith</b> </td> </tr> </table>			Date of the Actual Completion of the International Search  <b>31 October 1989</b>	Date of Mailing of this International Search Report  <b>29 NOV 1989</b>	International Searching Authority  <b>ISA/US</b>	Signature of Authorized Officer  <b>Ralph E. Smith</b>											
Date of the Actual Completion of the International Search  <b>31 October 1989</b>	Date of Mailing of this International Search Report  <b>29 NOV 1989</b>																
International Searching Authority  <b>ISA/US</b>	Signature of Authorized Officer  <b>Ralph E. Smith</b>																